UNCLASSIFIED

AD NUMBER AD868333 **NEW LIMITATION CHANGE** TO Approved for public release, distribution unlimited **FROM** Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; Mar 1970. Other requests shall be referred to Naval Weapons Center, China Lake, CA. 93555. **AUTHORITY** NWC ltr, 17 Apr 1979


NWC TP 4824 Part 1 COPY 145

THERMAL EXPOSURE OF AMMUNITION ON BOARD SHIP Part 1. CRUISERS AND LARGE DESTROYERS

bу

Sakaye Matsuda and Howard C. Schafer Propulsion Development Department

ABSTRACT. The magazine air temperature records from CAG, CA, DDG, DLG, and DLG(N) type ships have been statistically analyzed to obtain the probable thermal exposure to be found on these type ships. The information is divided into the temperature expectancies for the 03, 02, 01, 1, 2, 3, 4, 5, and 6 deck levels as applicable. Effort has been made to eliminate information from compartments influenced by the engine room. This report includes 71,016 data points from the six ships. The ships were all assigned to the 7th Fleet in this time frame.





NAVAL WEAPONS CENTER


CHINA LAKE, CALIFORNIA . MARCH 1970

Reproduced by the CLEARINGHOUSE for icitical Scientific & Lecture at Information Springhold Va. 22151

DISTRIBUTION STATEMENT

THIS DOCUMENT IS SUBJECT TO SPECIAL EXPORT CONTROLS AND EACH TRANSMITTAL TO FOREIGN GOVERNMENTS OR FOREIGN NATIONALS MAY BE MADE ONLY WITH PRIOR APPROVAL OF THE NAVAL WEAPONS CENTER.

DISCLAIMER NOTICE



THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

REPRODUCED FROM BEST AVAILABLE COPY

NAVAL WEAPONS CENTER AN ACTIVITY OF THE NAVAL MATERIAL COMMAND

FOREWORD

This effort has been undertaken to determine the valid shipboard environment of ammunition and was supported by the Naval Ordnance Systems Command, CHAFFROC Program, Allotment 17X1810.1718 (36700) OPN.

Part 1. Cruisers and Large Destroyers, covers the probable thermal exposure to be found on these types of ships.

Additional publications covering probable thermal exposure on DD type, ammunition, and other naval ships are anticipated. The shipboard magazine air temperature records are being collected at NWC. China Lake and will be statistically analyzed when funding becomes available.

This report has been reviewed for technical accuracy by Warren W. Oshel.

Released by CRILL MAPLES, Head Quality Assurance Division 1 March 1970 Under authority of G. W. LEONARD, Head Propulsion Development Department

J. Complete Section of

NWC Technical Publication 4824, Part 1

1

V

..

BLANK PAGE

ACKNOWLEDGMENT

The authors are indebted to personnel on the USS ST. PAUL (CA73), USS GRIDLEY (DLG21), USS ENGLAND (DLG22), USS LYNDE McCORMICK (DDG8), USS BAINBRIDGE (DLG(N)25) and USS BOSTON (CAG1), who provided the ship-board magazine temperature data, photographs and other valuable information concerning storage magazines.

The authors are also indebted to Lt. Comdr. J. W. Allen of NWC for his assistance in coordinating direct liaison with the USS ST. PAUL, USS LYNDE McCORMICK and USS BAINBRIDGE. He also provided pertinent information and the Booklet of General Plans of the ships. The explanation of deck levels and magazine compartment identifications he provided placed the data into meaningful context.

Acknowledgments are extended to Lt. McMurray of USS ST. PAUL, Lt. J. A. Dail of USS BAINBRIDGE, and Ens. H. O. Buzhardt, Jr. of USS LYNDE McCormick for the efficient guidance they provided to the author on board their respective ships.

Special acknowledgment is made to Mrs. Georgia Wagner who has generated, via computer and its peripheral equipment, the pertinent statistics and graphs presented in this report.

CONTENTS

Introduction	1
Scope	2
Instrumentation	2
Procedures	4
Results	7
Conclusion	27
Appendixes:	
A. Data Handling	29
B. Explanation of Deck Level and Compartment	
Identifications	}3
C. Sample Data	3 5
D. Official U. S. Navy Photographs 4	11
E. Applicable Statistics	19
References	3 4

INTRODUCTION

When designing a ship-launched weapon, it is important to know the environmental temperature range that the weapon will experience during storage and operation. It became evident early in the Shipboard Chaff Rocket Decoy System (Chaffroc) program that the thermal regime as it pertains to shipboard storage and use was not defined.

The Naval Weapons Center (NWC), China Lake, California was aware that the Fleet had been required to record the maximum and minimum air temperatures in each magazine on board every ship in all Fleets for years. The question was, how could these records be obtained, and how far back did they exist? On investigation, it was learned that the requirement was strictly for safety. The records had to be retained on board the ship for one to two years, and then were destroyed. NWC instigated a request that, instead of destroying these records, they be sent to a central collection point at NWC for use. In 1967 Chief of Naval Operations instructed all Fleet elements to send their obsolete magazine temperature records to China Lake, California. In an effort to define the maximum temperature environment in which the Chaff Rocket will be stored and fired, some of these records are herein reported.

At present 169 ships from the First, Second, Sixth, and Seventh Fleets are responding to the request for magazine temperature records. It was decided that the information from the cruisers and newer destroyers would be used in the pilot program and reported in Part 1 of this series. Eventually all ship classes will be divided into logical study units and similar reports detailing the storage temperatures for each group prepared.

It is realized that the information necessary for a complete definition of the extreme circumstances is not available. For example, the exact position of the ship, day by day, is not available to the authors. Therefore, it is possible that even with the masses of data presented, a chance exposure to less moderate temperatures could be experienced. Also, the authors have no control over ship deployment, nor the personnel actually recording the individual temperature readings. All the authors can do and have done, is to investigate the sources of error inherent in the existing collection system and compensate for them. For example, it became obvious that the measuring instrument, a "horseshoe" thermometer equipped with maximum and minimum temperature "tattletales," could be affected by ship vibration. If mounted on a resonating bulkhead, the vibration can shake the tattletales back down to the menisci of the mercury. This is evidenced in the records by identical maximum and minimum temperature entries for an interval of several days.

The lack of information on ship location for a given day should not invalidate the data obtained since a correlation was made during the investigation of the service temperature of the ASROC missile (Ref. 1 and 2). It consisted of comparing the recorded sea water temperature

Part 1

with the minimum recorded ASROC motor temperature for the same day and the results indicated that they were within a few degrees of each other. Therefore, since it is known that the data were from ships assigned to the Seventh Fleet when deployed, and the Seventh Fleet's area of interest is the Western Pacific, then given the month and minimum compartment temperatures a good guess of where the ship was located can be made. It was also indicated in Ref. 1 and 2 that the Western Pacific area could be the warmest area in which our ships will be required to deploy. The time frame of the reported data encompasses a period when the scene of action for the candidate ships was between 9 and 20° North latitude in the South China Sea. Based on these factors, it was decided that these data, though admittedly incomplete and imperfect, would be of extreme value in determining the environmental temperature criteria to which a majority of ship-launched ordnance will be exposed. This work is the basis of the maximum temperature entries under Shipboard Storage, Handling, At-Sea-Transfer, and Launch-to-Target as reported in Ref. 3, "Stockpile-to-Target Sequence for the Chaff Rocket."

SCOPE

The information reported herein applies only to ammunition and pyrotechnics stored in conventional compartments and above-deck lockers. The majority of these shipboard ammunition lockers have a double roof which is extremely effective in negating the maximum effect of solar radiation. If a special above-deck locker is designed and fabricated, then it is possible that these corresponding reported values could change. However, it appears that the values reported are generally consistent; even though the ready-service, pyrotechnic-grenade, and fuse lockers mounted above deck come in assorted shapes and sizes. Therefore, these data should provide a good indication of what to expect in any new storage locker, within reason.

These data, in all probability, are also useful in delineating the base line of exposure for electronic gear mounted on shipboard. However, it must be realized that electronics are heat-generating in nature; therefore, the maximum component temperatures will be higher than the magazine air temperatures.

INSTRUMENTATION

The maximum and minimum temperature data of the shipboard magazines were obtained from the horseshoe-type mercury thermometers equipped with floating steel tattletale devices (Fig. 1).

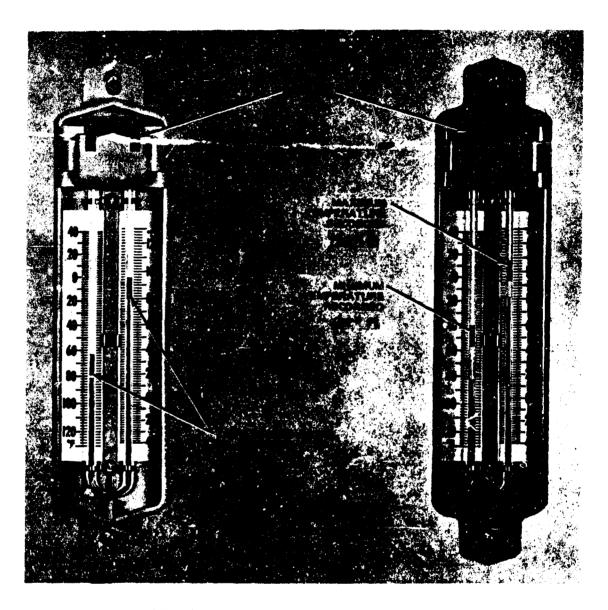


FIG. 1. Horseshoe—Type Thermometer.

Part 1

The tattletale devices rest on the menisci of the mercury and are moved only in the upward direction. When a meniscus moves in the down-ward direction it leaves the tattletale at the departure point indicating the maximum or the minimum temperature for the measurement period. The tattletales are reset to rest on the menisci with a magnet after recording the maximum and the minimum temperatures.

The manufacturers of the thermometers (Taylor, Weksler, and Moeller) warrant that the temperature readings are accurate to within 2°F at the time of delivery. These thermometers are generally mounted on the bulkhead of the ship or laid on top of the ordnance within the locker.

PROCEDURES


The raw data were received from USS BOSTON (CAG1), USS ST. PAUL (CA73), USS LYNDE McCORMICK (DDG8), USS GRIDLEY (DLG21), USS ENGLAND (DLG22), and USS BAINBRIDGE (DLG(N)25) in various forms. In some cases, they were on individual sheets gathered together in an envelope. Some ships sent the individual monthly magazine temperature record cards (COMCRUDESPAC-GEN-8020/3), one for each magazine or locker on the ship per month. Figure 2 illustrates the condition of the data in general when received by NWC.

The candidate ships were selected on the basis of their submitted temperature records, area of deployment, and class. Their records were then processed, as detailed in Appendix A, by the Analysis Branch, Propulsion Development Department at NWC.

The raw data were reduced, tabulated, and plotted to yield meaningful statistics and significant points of interest for upper and lower deck levels of each ship.

The physical construction of the typical above-deck ammunition storage locker is shown in Fig. 3. As can be seen, the locker usually has a double roof and some have double sides as well. Access to these above-deck lockers can either be from a hinged top, or side. In general, the thermometer and temperature record card are placed on top of the stored ammunition or pyrotechnics. Therefore, if the locker is full, the measuring instrument is near the top of the locker and if nearly empty, the thermometer is close to the bottom. There is a distinct thermal gradient in any enclosed space. The nearer to the top a measurement is taken, the more extreme it will be since hot air rises.

The situation below decks is much more stable and predictable. The thermometer and record card are secured to a bulkhead in the magazine. This dual installation is usually about 4 feet above the floor of the compartment. The thermal gradient in a compartment is not as severe as

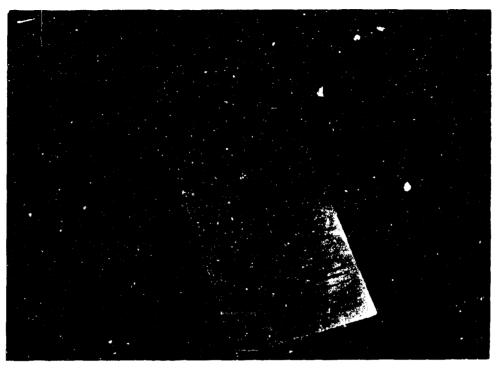

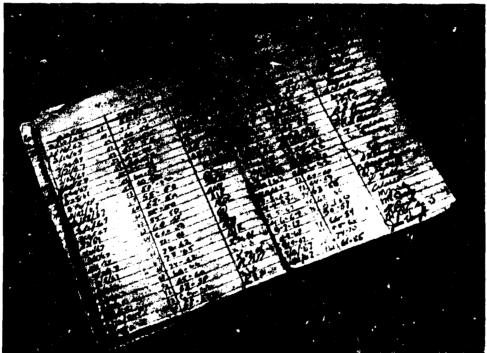


FIG. 2. Raw Data on Card and Log Book.



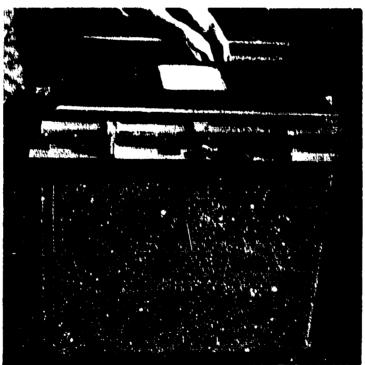


FIG. 3. Upper Deck Level Storage Lockers.

in an exposed locker. Also, on all post World War II ships, the magazines are below the waterline. Usually the only facilities for ammunition above the waterline in a ship are intermediary handling rooms for gun ammunition. Figure 4 depicts a typical below-deck storage situation.



FIG. 4. Lower Deck Level Storage Magazine.

RESULTS

The ship magazine data were grouped into upper and lower deck level data. The upper deck level data include all data from magazines located on the main deck (1 level) through all deck levels above the main deck. The lower deck level data include all data from magazines located below main deck level. An explanation of deck levels and magazine compartment identifications is given in Appendix B.

The ship identification, the year, the number of months, and the number of temperature data recorded for upper and lower deck levels are listed in Tables 1 and 2, respectively. The maximum temperature data were sorted into logical groups. The plan was to show the number of temperature readings less than or equal to 75 through 120°F at 5° increments for both levels per year per ship. The maximum temperature for the given period is also listed.

TABLE 1. DATA SUMMARY BY SHIPS - UPPER LEVELS

	<u> </u>			10 Mary - 4 Al- (M. 1-2 MC)			max im						*****	Max. Temp.
811118	YKii	Min	N ¹	7.	m	The same of the sa	111	1		10.	ĽЩ	TI:	150	***
CA 71	1966	l i	1040	1409	460	714	791	570	24	U	0	0	0	114
DIGEL	1963	5	111	40	titi	16	9	1	0	0	0	0	0	92
11 11	1964	н	901	217	177	108	450	142	94	30	ч	0	0	110
11 11	1966	4	466	108	144	60	138	14	12	(1)	0	0	0	100
11 11	1967	t b	HSO	467	215	64	HO	45	H	1	(1)	0	0	101
DIX 8	1961 1962 1963 1964	4 8 12 1	548 827 2141 36	250 938 1057 25	151 187 458 11	54 205 205	80 71 249 0	0 96 0	25 45 40	0 0 11 0	0 0	0 - 0	0000	98 98 112 80
DLG (N) 25	1963	a	15.19	497	386	234	189	97	102	15	3	0	0	108
11 11 11 11 11 11 11 11 11 11 11 11 11	1964	12	1905	690	373	286	3 2 3	150	73	1 6	0	0	ö	100
11 11	1965	l ii l	1588	281	235	249	395	553	196	q	0	ő	ö	104
11 11	1966	11	1748	253	233	129	41H	217	344	42	9	3	ö	113
CAG 1	1964 1965 1966 1967	12 9 8 7	2904 3085 5158 3050	1693 2020 3790 368	532 565 649 668	933 289 370 751	291 209 290 7 89	2 2 30 301	3 0 24 164	0 0 5 8	0 0	0 0 0	0 0 0	96 93 104 106
SUMMAT		137		13553			4376			108	26	4	0	

^aMonth - Number of months in a given period.

^bNumber of data points represented in the sample.

TABLE 2. DATA SUMMARY BY SHIPS - LOWER LEVELS

handingen den der der		- 1										Max.		
	 .		N ¹⁾	-								t. 		Temp.
HULE	IXE.	Nose	<u> </u>	, ()	<u> HO</u>	181	90	1 117	100	100	1110		150	er.
CA 74	1966	11	нозн	1144	1646	1595	1451	146	16	0	0	0	0	99
0031	1964	h	1107	656	240	126	71	1	0	0	0	0	0	94
11 11	1964	10	2317	934	787	393			14	0	()	0	()	98
11 11	1966	14	085	444	153	64	15		0	0	()	(0)	()	88
11 11	1967	6	1474	180	107	0.5	24	()	U	0	0	0	0	88
DLC 22	1964	١	86	H2		. ,	0	0	o o	0	0	0	ი	80
11 11	1965	11	925			27	0	0	0	0	Ü	()	()	84
11 11	1966	11	73.1	560	143	54	0	0	0	0	ü	0	C)	85
PIKIG	1961	ų	ลสล	564	151	59	64	0	0	o	0	0	O	90
11 11	1962	10	1851	1320	425	88	4.5	1	5	0	0	0	0	97
11 11	1963	1.2	2485	1333	609	350	113	19	1	0	0	0	0	96
11 11	1964	1	41	40	1									78
DIG														
(N) 25	1963	7	1287	898	2112	127	19	1	0	0	0	Û	0	94
11 11	1964	12	5850	1951	629	508	36	0	0	0	a	0	0	88
11 11	1965	1.1	2137	1093	542	175	150	7	0	0	0	0	0	911
11 11	1966	11	1853	1035	351	357	78	8	O	0	0	0	0	97
CAG.1	1963	6	319	319	U	0	0	a	0	0	0	0	0	75
11 11	1964	1.2	730	697	25	8	0	0	0	0	0	0	0	85
11 11	1965	1.2	5949	1716	840	3.24	66	3	0	0	0	0	0	94
11 11	1966	8	4200	2712	787	379	280	40	2	۵	0	0	0	98
17 17	1967	7	3776	1091	404	930	1041	283	26	1	0	0	0	102
SUMMAT	LON	173	40520	22378	8444	5450	3478	714	55	1	0	0	0	

^aMonth - Number of months in a given period.

 $^{^{\}rm b}$ Number of data points represented in the sample.

The data presented in Tables 1 and 2 show variations in temperatures from ship-to-ship, upper deck level to lower deck level, and within the ship. Some of these differences can be attributed to the differences in the locations of the ships, and the magazine air temperatures being directly affected by solar radiation, see water, etc.

The selected and combined data from all upper level magazines of the six ships are presented in Table 3. This set of data represents the monthly average temperature (X) and its estimated standard deviation (3) multiplied by 3 (36) added to the average temperature (X + 36). Data points showing the largest X + 36 variation in Table 3 were selected and combined to yield the plot on Fig. 5.

Similarly, the data were selected from the lower deck level magazines and processed to give the selected and combined data plots for the lower deck level (Table 4).

The monthly average temperature and the average temperature plus 30 value for upper and lower deck levels of each ship are presented in Fig. 6 through 8.

The histograms of the frequency distribution of the temperature readings of all data, from both upper and lower deck level magazines, with respect to the indicated temperature interval are shown in Fig. 9.

The histograms of the percentage distribution of the above frequency data with respect to the indicated temperature interval are shown in Fig. 10.

All temperature data available from the six ships were consolidated and grouped by month, upper and lower levels separately. The mean temperature (\overline{X}) , maximum temperature (MAX), average temperature of the highest 10 temperatures recorded $(\overline{X}_{TOP~10})$ and the number of data samples (N) were determined for each group and presented in Fig. 11 and 12. The data were also grouped together and the mean temperature (\overline{X}_{G}) , maximum temperature (MAX_ALL), average temperature of the highest 10 temperatures recorded $(\overline{X}_{TOP~10})$, and the total number of data samples (N_{TOTAL}) were determined; these are listed in the Total column. The graphs presented in Fig. 11 and 12 show the mean temperature (\overline{X}) plot (solid points) and the average temperature of the highest 10 temperatures recorded $(\overline{X}_{TOP~10})$ plot (circled points) for the data group.

The data which support Tables 1 through 4 and the plots of Fig. 5 through 12 are available in permanent file at the Analysis Branch office. Sample copies of these data are presented in Appendix C.

Official U. S. Navy photographs of USS ST. PAUL, USS GRIDLEY, USS ENGLAND, USS LYNDE McCORMICK, USS BAINBRIDGE and USS BOSTON are presented in Appendix D.

TABLE 3. MONTHLY MEAN AND STANDARD DEVIATION DATA - UPPER LEVEL.

SHIPS	Mos.	YEAR	N	MEAN	_6	MAX. TEMP.	3ढ़	$\overline{X} + 3\hat{\sigma}$
DDG 8 DDG 8 DLG (N) 25 DDG 8 DLG (N) 25 CAG 1 DLG (N) 25	JAN JAN JAN JAN JAN JAN JAN JAN JAN JAN	1962 1963 1964 1964 1964 1965 1965 1966 1967 1967 1962 1963 1964 1965 1965	125 186 14 36 334 155 84 155 793 521 154 29 140 174 166	75.8 72.6 66.4 11.2 67.0 62.6 74.0 76.2 79.0 86.1 64.2 82.3 74.4 66.9 55.5 75.5 65.7 79.3 78.2 88.9	11.72 6.58 10.83 6.37 12.64 2.70 3.74 12.32 11.08 9.61 8.13 8.20 9.17 18.93 7.80 13.85 4.86 9.36 6.32 8.16	98 83 80 80 100 68 79 98 99 86 104 97 76 100 74 90	35.16 19.74 32.49 19.11 37.92 8.10 11.22 36.96 33.24 28.83 24.60 27.51 56.79 23.40 41.55 14.58 28.08 18.96 24.48	110.96 92.34 98.89 90.31 104.92 82.10 85.22 113.16 112.24 114.93 88.59 106.90 101.91 123.69 78.90 117.05 80.28 107.38 97.16 113.38
CAG 1 CA 73 CAG 1 DLG 21	FEB FEB FEB	1966 1966 1967 1967	713 162 29 135	69.8 66.6 60.0 75.8	7.69 7.17 7.44 8.65	90 88 72 90	23.07 21.51 22.32 25.95	92.87 89.11 82.32 101.75
DDG 8 DDG 8 DLG (N) 25 CAG 1 DLG (N) 25 CAG 1 DLG (N) 25 CAG 1 CA 73 CAG 1 DLG 21	MAR	1962 1963 1964 1964 1965 1965 1966 1966 1967 1967	15 186 142 31 124 98 178 848 279 368 155	78.1 67.1 80.7 64.0 77.0 70.5 89.7 68.1 68.8 79.2 73.4	2.07 17.79 8.48 3.09 9.38 8.88 8.15 11.48 6.77 6.53 5.84	80 94 98 70 92 87 99 88 84 101	6.21 53.37 25.44 9.27 28.14 26.64 24.45 34.44 20.31 19.59 17.52	84.31 120.47 106.14 73.27 105.14 97.14 114.15 102.54 89.11 98.79 90.92

TABLE 3. (CONTINUED)


SHIPS	MOS.	YEAR	N	M <u>E</u> AN X	δ	MAX. TEMP.	3€	\(\overline{X} + 3\hat{\sigma} \)
DDG 8 DLG (N) 25 DLG (N) 25 CAG 1 DLG 21 DLG (N) 25 DLG (N) 25 CAG 1 CA 73 CAG 1 DLG 21	APR	1963 1964 1964 1964 1965 1966 1966 1967	174 312 62 186 88 148 160 765 270 741 150	82.9 75.5 77.9 67.1 79.6 76.9 91.7 56.4 69.5 81.2 78.6	4.75 4.88 8.57 8.97 9.94 10.01 8.21 9.37 6.30 6.45 8.75	92 98 98 88 97 96 113 85 84 104	14.25 14.64 25.71 26.91 29.82 30.03 24.63 28.11 18.90 19.35 26.25	97.15 90.14 103.61 94.01 109.42 106.93 116.33 84.51 88.40 100.55 104.85
DDG 8 DLG(N) 25 DLG(N) 25 CAG 1 DLG 21 DLG(N) 25 DLG(N) 25 CAG 1 CA 73 CAG 1 DLG 21	MAY	1963 1963 1964 1964 1965 1966 1966 1967	174 299 153 84 124 153 186 750 270 819 152	83.6 79.9 80.8 76.0 76.0 88.2 92.8 68.7 69.6 87.6 71.4	11.24 4.95 4.51 8.21 10.28 6.06 8.41 12.99 5.57 6.22 11.52	103 94 90 96 99 88 110 98 84 106 94	33.72 14.85 13.53 24.63 30.84 18.18 25.23 38.97 16.71 18.66 34.56	117.32 94.75 94.33 100.63 106.84 106.38 118.03 107.67 86.31 106.26 105.96
DDG 8 DLG (N) 25 DLG (N) 25 CAG 1 DLG (N) 25 DLG (N) 25 DLG (N) 25 CAG 1 CA 73 CAG 1 DLG 21	NUUL NUUL NUUL NUUL NUUL NUUL NUUL NUUL	1963 1964 1964 1964 1965 1966 1966 1966 1967	177 305 150 188 111 128 180 352 459 546 110	70.1 82.7 86.9 71.1 78.7 88.0 85.4 73.6 87.2 86.1 73.0	12.62 8.06 5.50 8.19 7.61 6.17 10.50 9.77 4.84 6.20 6.83	84 97 98 89 99 101 108 94 97 100 94	37.86 24.18 16.50 24.57 22.83 18.51 31.50 29.31 14.52 18.60 20.49	107.96 106.88 103.40 95.67 101.53 106.51 116.90 102.91 101.72 104.70 93.49

TABLE 3. (CONTINUED)

SHIPS	MOS.	YEAR	N	MEAN X	6	MAX. TEMP.	3奇	$\overline{X} + 3\hat{\sigma}$
DDG 8 DDG 8 DLG (N) 25 DLG 21 DLG (N) 25 CAG 1 DLG 21 CA 73	JUL JUL JUL JUL JUL JUL JUL JUL	1962 1963 1963 1964 1964 1965 1965 1966 1966	21 185 155 20 155 317 123 143 268 185 26 10 423	79.6 80.6 87.5 74.0 88.4 80.8 90.4 91.7 70.7 81.6 79.9 76.2 86.4	6.26 10.24 7.32 6.86 5.79 6.52 9.53 6.60 8.85 6.88 9.68 3.63 4.56	86 112 100 88 98 90 110 102 93 94 98 82 96	18.78 30.72 21.96 20.58 17.37 19.56 28.59 19.80 26.55 20.64 29.04 10.89 13.68	98.38 111.32 109.48 94.58 105.77 100.36 118.99 111.50 97.25 102.24 108.04 87.09 100.08
DDG 8 DLG (N) 25 DLG 21 DLG (N) 25 CAG 1 DLG 21 CAG 1 DLG (N) 25 CAG 1 DLG (N) 25	AUG AUG AUG AUG AUG AUG AUG AUG AUG	1967 1963 1963 1964 1964 1964 1965 1966	45 183 161 31 155 434 120 163 186 430	80.4 76.7 93.0 78.8 85.0 81.8 90.2 78.9 87.1 86.1	4.88 9.62 7.57 5.16 6.85 6.05 6.35 10.81 8.47 4.21	86 90 108 86 96 89 100 92 100	14.64 28.86 22.71 15.48 20.55 18.15 19.05 32.43 25.41 12.63	95.04 105.56 115.71 94.28 105.55 99.95 109.25 111.33 112.51 98.73
DDG 8 DDG 8 DDG 8 DLG (N) 25 DLG 21 DLG (N) 25 CAG 1 DLG (N) 25	SEP SEP SEP SEP SEP SEP SEP SEP SEP SEP	1961 1962 1963 1963 1964 1964 1964 1965 1965 1966	116 85 176 20 30 150 406 89 75 197 54 376	83.4 79.9 83.8 84.8 78.8 72.7 78.4 88.7 88.9 78.3 89.0 86.0	5.67 6.27 9.19 7.24 6.01 10.71 6.76 6.51 8.65 5.83 4.51 4.27	98 92 109 97 92 96 89 99 104 89 97	17.01 18.81 27.57 21.72 18.03 32.13 20.28 19.53 25.95 17.49 13.53 12.81	100.41 98.71 111.37 106.52 96.83 104.83 98.68 108.23 114.85 95.79 102.53 98.81

TABLE 3. (CONTINUED)

SHIPS	MOS.	YEAR	N	MEAN X	ŝ	MAX. TEMP.	3€	$\overline{X} + 3\hat{\sigma}$
DDG 8 DDG 8 DDG 8 DLG 21 DLG (N) 25 CAG 1 DLG 21 DLG (N) 25 CAG 1	TOO TOO TOO TOO TOO TOO TOO TOO	1961 1962 1963 1963 1964 1964 1964 1965	124 186 167 46 155 434 120 186 521	78.8 78.0 75.0 76.9 78.0 74.0 85.1 83.9 76.2	6.38 5.59 7.62 3.82 9.01 6.97 8.47 7.93 7.16	90 98 90 86 96 88 97 99	19.14 16.77 22.86 11.46 27.03 20.91 25.41 23.79 21.48	97.94 94.77 97.86 88.36 105.03 94.91 110.51 107.69 97.68
DLG (N) 25 DLG 21 CA 73	OCT OCT OCT	1966 1966 1966	103 125 374	79.9 82.0 82.6	8.73 8.90 6.32	98 100 97	26.19 26.70 18.96	106.09 108.70 101.56
DDG 8 DDG 8 DDG 8 DLG 21 DLG (N) 25 CAG 1 DLG (N) 25	NOV NOV NOV NOV NOV NOV NOV NOV NOV NOV	1961 1962 1963 1963 1964 1964 1965 1965 1966 1966	176 174 179 4 144 419 73 150 640 166 162 150 312	72.9 75.0 67.8 75.8 81.2 67.9 71.8 88.1 68.5 77.2 61.8 76.0 69.0	6.95 8.53 7.92 5.19 8.43 6.30 8.86 8.24 7.58 8.65 10.40 7.74 6.91	90 97 84 79 98 86 86 99 88 97 83 88	20.85 25.59 23.76 15.57 25.29 18.90 26.58 24.72 22.74 25.95 31.20 23.22 20.73	93.75 100.59 91.56 91.37 106.49 86.80 98.38 112.82 91.24 103.15 93.00 99.22 89.73
DDG 8 DDG 8 DDG 8 DLG (N) 25 DLG (N) 25 CAG 1 DLG (N) 25 CAG 1 CAG 1 DLG 21 CAG 73	DEC	1961 1962 1963 1963 1964 1965 1965 1966	122 186 179 253 148 345 186 940 775 181 301	70.6 53.7 69.3 58.8 71.4 64.4 88.3 68.1 75.4 83.8 66.5	6.42 11.26 8.17 13.11 10.95 8.95 7.55 6.97 13.73 6.04 7.07	86 88 94 86 88 99 90 104 100 84	19.26 33.78 24.51 39.33 32.85 26.85 22.65 20.91 41.19 18.12 21.21	89.86 87.48 93.81 98.13 104.25 91.25 110.95 89.01 116.59 101.92 87.71

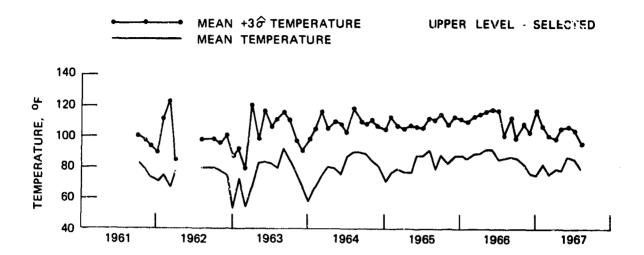

LOWER LEVEL - SELECTED

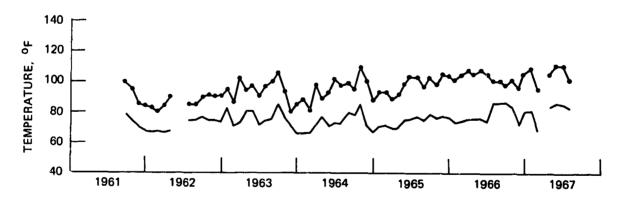


FIG. 5. Plots of Mean and Mean $+3\widehat{o}$ Temperature Data, Selected and Combined.

TABLE 4. MONTHLY MEAN AND STANDARD DEVIATION DATA-LOWER LEVEL.

				MEAN		Max.		
SHIPS	MONTH	YEAR	N	X	σ̂	Temp.	36	$\overline{X} + 3\hat{\sigma}$
DDG 8 DDG 8 DDG 8 DDG 21 DLG (N) 25 CAG 1 DLG 22 DLG (N) 25 CAG 1 DLG 22 DLG (N) 25 CAG 1 DLG 22 DLG (N) 25 CAG 1 DLG 21 CAG 1	JAN	1962 1963 1964 1964 1964 1965 1965 1965 1966 1966 1966	217 217 41 43 213 62 115 216 62 60 186 651 248 756	66.7 82.7 67.9 72.3 66.4 62.7 69.8 70.4 59.1 72.7 73.6 72.9 72.5 81.0	5.22 3.96 3.40 4.98 7.35 2.43 3.42 7.69 3.82 1.95 9.16 5.74 5.66 9.00	84 92 78 84 85 68 80 88 68 77 89 89	15.66 11.88 10.20 14.69 22.05 7.29 10.26 23.07 11.50 5.85 27.48 17.22 16.98 27.00	82.36 94.58 72.10 86.99 88.45 69.99 80.06 93.47 70.60 78.55 101.08 90.12 89.48 108.00
DDG 8 DDG 8 DLG(N) 25 CAG 1 DLG 22 DLG(N) 25 CAG 1 CA 73 DLG 22 DLG(N) 25 CAG 1 DLG 21 CAG 1	FEB FEB FEB FEB	1962 1963 1964 1964 1965 1965 1966 1966 1966 1966 1967	154 196 203 58 57 191 56 468 56 168 615 214 670	66.6 70.9 69.7 66.1 76.0 70.8 60.8 70.8 71.2 73.8 72.2 71.7 67.6	4.51 5.29 8.65 5.17 3.32 7.28 4.86 5.80 1.71 10.15 5.19 6.67 9.11	83 85 90 75 80 85 71 88 76 88 88 86 92	13.53 15.87 25.95 15.51 9.96 21.84 14.58 17.40 5.13 30.45 15.57 20.01 27.33	80.13 86.77 95.65 81.11 85.96 92.64 75.38 88.20 76.33 104.25 87.77 91.71 94.93
DDG 8 DDG 8 DLG (N) 25 CAG 1 DLG (N) 25 CAG 1 DLG 22 DLG (N) 25 CAG 1 DLG 22 CAG 1 DLG 22 CA 73 DLG 21 CAG 1	MAR MAR MAR MAR MAR MAR MAR MAR MAR MAR	1962 1963 1964 1964 1965 1965 1966 1966 1966 1966 1967	155 217 242 62 215 62 124 186 682 93 805 247 679	65.9 72.6 71.1 64.2 69.1 63.7 72.9 75.8 72.2 70.8 72.1 72.5 77.9	6.16 10.00 8.98 3.37 6.46 4.76 3.81 10.53 4.88 3.00 5.80 5.66 9.69	81 92 88 75 85 77 82 96 89 80 87 88 94	18.48 30.00 26.94 10.11 19.38 14.28 11.43 31.59 14.64 9.00 17.40 16.98 29.01	84.38 104.60 98.04 74.31 88.48 77.98 84.33 107.39 86.84 79.80 89.50 89.48 106.91

TABLE 4. (CONTINUED)

			TADLE		CIVITINOIN			
SHIPS	MONTH	YEAR	N	MEAN X	ŝ	Max. Temp.	36	$\overline{X} + 3\hat{\sigma}$
DDG 8 DDG 8 DLG(N) 25 DLG(N) 25 CAG 1 DLG 21 DLG 22 DLG(N) 25 CAG 1 DLG 22 DLG(N) 25 CAG 1 CAG 1 CA 73 CAG 1	APR APR APR APR APR APR APR APR APR APR	1962 1963 1963 1964 1964 1965 1965 1966 1966 1966	200 210 204 26 60 218 63 207 60 89 180 635 780 656	67.5 80.9 67.4 67.9 66.9 76.6 73.7 69.1 60.2 71.3 75.3 69.4 74.1	7.35 4.61 6.74 6.68 4.13 4.17 4.73 7.35 2.75 5.75 10.13 5.67 5.70 7.25	89 96 82 81 76 95 83 86 67 76 90 86 99	22.05 13.83 20.22 20.04 12.39 12.51 14.19 22.05 8.25 17.25 30.39 17.01 17.10 21.75	89.55 94.73 87.62 87.94 79.29 89.11 87.89 91.15 68.45 88.55 105.69 86.41 91.20 105.15
DLG 21 DDG 8 DLG (N) 25 DLG (N) 25 CAG 1 DLG 22 DLG (N) 25 CAG 1 DLG 22 DLG (N) 25 CAG 1 DLG 22	APR MAY	1967 1963 1964 1964 1964 1965 1965 1966 1966 1966 1966 1967	241 205 217 217 62 308 124 202 62 91 181 495 780 498 248	72.4 80.6 69.9 70.2 69.1 75.5 68.6 74.5 63.1 72.3 75.7 73.9 74.6 85.9 69.8	6.54 5.43 5.42 7.52 3.27 4.54 2.48 8.07 3.34 1.77 10.50 8.89 5.03 8.25 6.66	88 94 82 83 75 95 74 89 72 76 89 94 88 102 86	19.62 16.29 16.26 22.56 9.81 13.62 7.44 24.21 10.02 5.31 31.50 26.67 15.09 24.75 19.98	92.02 96.89 86.16 92.76 78.91 89.12 76.04 98.71 73.12 77.61 107.20 100.57 89.69 110.65 89.78
DDG 8 DLG (N) 25 DLG (N) 25 CAG 1 DLG 21 DLG 22 DLG (N) 25 CAG 1 DLG 22 DLG (N) 25 CAG 1 CAG 1 CA 73 CA 1 DLG 21	JUNE JUNE JUNE JUNE JUNE JUNE	1964 1964 1965 1965 1965 1966 1966	210 210 210 60 283 122 206 60 85 180 186 775 449 176	72.3 70.8 73.2 70.8 77.0 68.0 75.8 66.1 70.3 73.3 76.3 84.9 85.2 72.18	4.85 6.41 9.26 3.84 4.03 2.95 9.00 4.27 4.82 10.32 7.60 5.35 8.40 4.23	89 94 88 79 89 73 90 76 82 97 95 97 98 80	14.55 19.23 27.78 11.52 12.09 8.85 27.00 12.81 14.46 30.96 22.80 16.05 25.20 12.69	86.85 90.03 100.98 82.32 89.09 76.85 102.80 78.91 84.76 104.26 99.10 100.95 110.40 84.87

TAILE 4. (CONTINUED)

***************************************		T	<u> </u>	MEAN	<u> </u>	Max.	T	
SHIPS	MONTH	YEAR	N	1 2	6	Tome	10	1 7 10
DDG 8	JULY	1962	171	74.0	4.83	91	11.00	85,49
DDG 8	צוטג	1964	213	74.0	1.68	H4	11.00	84.04
DLG (N) 25	JULY	1963	217	79.9	7.72	H)	21,16	97.56
CAG 1	JULY	1964	10	67.2	3.04	71	9.12	76.32
DLG 2.1	אַנוטוג	1963	178	73.4	8.09	90	24.12	97.42
DLG(N) 25	אַזייווי	1964	217	72.8	8.46	85	25.38	98.18
CVC 1	JULY	1964	62	71.2	5.73	89	17.19	88,49
DLG(N) 25	JULY	1965	173	76.4	9.05	89	27.15	101.55
CAG 1	JULY	1965	62	62.4	4.14	80	12.42	74.82
DLG 22	JULY	1966,	40	75.9	4.82	45	14,46	90.46
DLG (N) 25	JULY	1966	ી શક		8.51	44	25,53	92.53
DLG 21	JULY		10	76.2	3,63	82	10.89	87.09
CA 73		1966	E08		4,85	96	14.55	100.25
CAG 1		1967	82		6.33	89	18.99	100,99
DIC 57	YUUY	1964	310	78.2	6,17	98	18.51	92.71
DDG 8	AUG	1962	203	74.0	3.80	90	11,52	85,52
DDG 8	AUG	1963	209	75.5	4.02	88	12.06	87,56
DLG (N) 25	AUG	1963	216	75.6	8,15	90	24.45	100.05
CAG 1	AUG	1963	62	65.2	2.52	74	7.56	72.76
DLG 21	AUG	1963	308	74.0	6.79	94	20.37	94.37
DLG(N) 25	AUG	1964	217	72.9	8.47	88	25.41	16.80
CAG 1	AUG	1964	62	67.8	4.13	79	12.39	80.19
DLG 21	AUG	1964	300	79.9	6.44	97	19.32	99.22
DLC 55	AUG	1965	48		7.56	811	22.68	96.78
CAG .I	AUG	1965	84	66.9	7.23	85	31.69	88.59
DLG(N) 25	AUG	1966	186	70.2	8.14	90	24,42	94.62
DLG 22	AUG	1966	55		5.02	84	15.06	89.76
CA 73	AUG	1966	806	86.0	4.69	98	14.07	100.07
DDG 8	SEP	1961	203	78.5	6.59	88	19.77	98.27
DDG 8	SEP	1962	121	76.5	4.45	88	13.35	89,85
DDG 8	SEP	1963	209	76.2	2.99	88	8.97	85.17
DLG (N) 25	SEP	1963	27	84.8	7.24	97	21.72	106,52
CAG 1	SEP	1963	60	67.0	2.91	75	8.73	75.73
DLG 21	SEP	1963	300		4.81	88	14,43	89.53
DLG(N) 25	SEP	1964	210	65.9	7.52	86	22.56	88.46
CAG 1	SEP	1964		65.7	4.17	75	12.51	78.21
DLG 21	SEP	1964	299	78.4	5.69	98	17.07	95.47
DLG(N) 25	SEP	1965	101	78.6	8.07	91	24.21	102.81
DLG 22	SEP	1965	60	71.9	7.56	84	22.68	94.58
CAG 1	SEP	1965	424	74.2	7.39	94	22.17	96.37
DI.G (N) 25	SEP	1966	75	70.6	8.45	81	25.35	95.95
DLG 22		1966	60	70.8	6.92	80	20.76	91.56
CA 73	SEP	1966	781	86.1	3.87	97	11.61	97,71

TABLE 4. (CONTINUED)

					·		· · · · · · · · · · · · · · · · · · ·	
SHIPS	MONTH	YEAR	N	MEAN X	δ	Max. Temp.	3€	$\overline{X} + 3\hat{\sigma}$
DDG 8 DDG 8 DDG 8 DDG 8 CAG 1 DLG 21 DLG (N) 25 CAG 1 DLG 21 DLG (N) 25 DLG 22 CAG 1 CA 73	OCT	1961 1962 1963 1963 1964 1964 1965 1965 1965 1966 1966	215 215 180 62 271 215 62 295 216 93 647 136 62 200 741	73.8 74.8 82.5 67.3 76.1 69.8 66.3 85.1 75.9 69.6 72.6 70.1 83.6	6.95 5.65 3.05 2.64 6.11 8.24 3.86 8.47 7.34 4.82 6.91 8.57 5.83 5.60	90 97 82 73 91 86 85 97 94 78 87 82 85 84 98	20.85 16.95 9.15 7.92 18.33 24.72 11.58 25.41 22.02 14.46 18.36 20.73 25.71 17.49 16.80	94.65 91.75 91.65 75.22 94.43 94.52 77.88 110.51 97.92 84.06 94.26 90.33 98.31 87.59 100.40
DDG 8 DDG 8 DDG 8 CAG 1 DLG 21 DLG (N) 25 CAG 1 DLG 21 DLG (N) 25 DLG 22 CAG 1 DLG (N) 25 DLG 22 CAG 1 DLG 22 CAG 1 DLG 21 CAG 3	NOV	1961 1962 1963 1963 1964 1964 1965 1965 1965 1966 1966	210 203 209 60 30 204 60 230 207 60 659 210 40 192 240 758	70.3 74.0 70.7 67.0 65.5 71.8 66.6 74.7 76.7 69.3 74.9 70.2 72.5 73.0 70.3 73.2	5.1 5.5 3.9 2.91 9.45 3.45 5.19 9.65 7.88 5.60 7.88 5.95 5.07	82 88 80 75 88 80 88 92 74 89 81 88 86 88	15.30 16.50 9.60 11.70 8.73 28.35 10.35 15.57 28.95 10.11 16.08 25.80 23.64 17.07 17.85 15.66	85.60 90.50 80.30 78.70 74.23 100.15 76.95 90.27 105.65 79.41 90.98 96.00 96.14 90.07 88.15 88.86
DDG 8 DDG 8 DDG 8 DDG 8 DLG (N) 25 CAG 1 DLG 21 DLG (N) 25 DLG 22 CAG 1 DLG 21 DLG (N) 25 DLG 22 CAG 1 CAG 1 CAG 1 CAG 73 DLG 21	DEC	1961 1962 1963 1963 1963 1964 1964 1964 1965 1965 1965 1966 1966	210 211 210 196 61 20 216 86 62 31 203 59 649 724 794 238	67.9 73.9 68.4 65.6 61.9 65.6 67.7 65.3 67.7 65.3 75.9 71.4 75.7 80.1 71.2 75.9	5.07 5.48 3.84 6.78 3.32 3.51 6.94 4.74 4.54 1.46 9.25 2.09 5.50 8.37 5.41 6.21	79 90 80 86 70 83 80 85 69 91 91 98 98	15.21 16.44 11.52 20.34 9.96 10.53 20.82 14.22 13.62 4.38 27.75 6.27 16.50 25.11 16.23 18.63	83.11 90.34 79.92 85.94 71.86 76.13 88.12 81.92 78.92 71.28 103.65 77.67 92.20 105.21 87.43 94.53

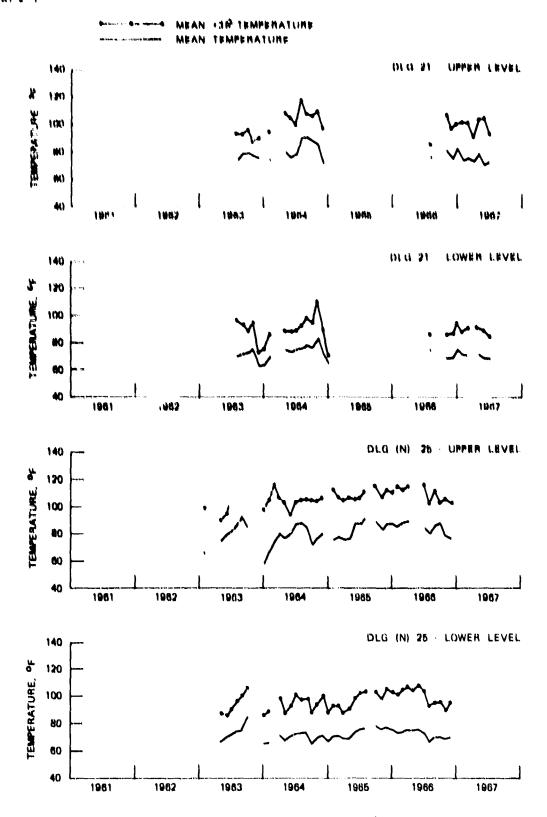


FIG. 6. Plots of Monthly Mean and Mean +36 Temperature Data.



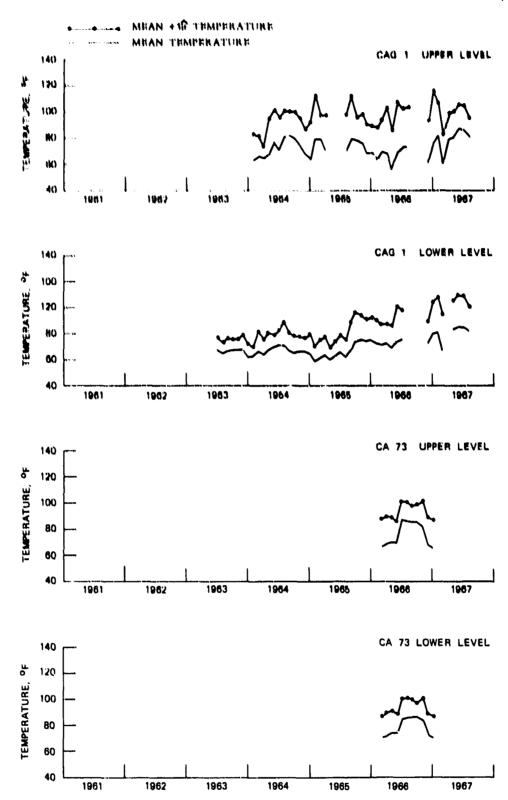


FIG. 7. Plots of Monthly Mean and Mean +36 Temperature Data.

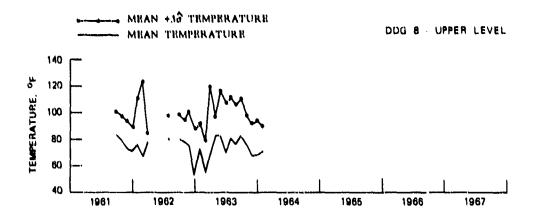

DDG 8 - LOWER LEVEL

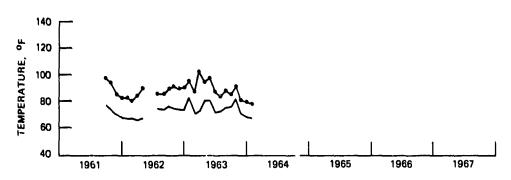

DLG 22 - LOWER LEVEL

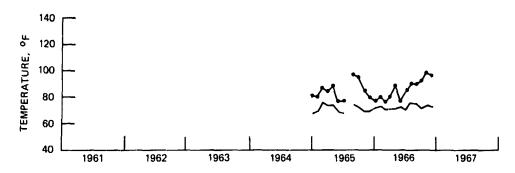
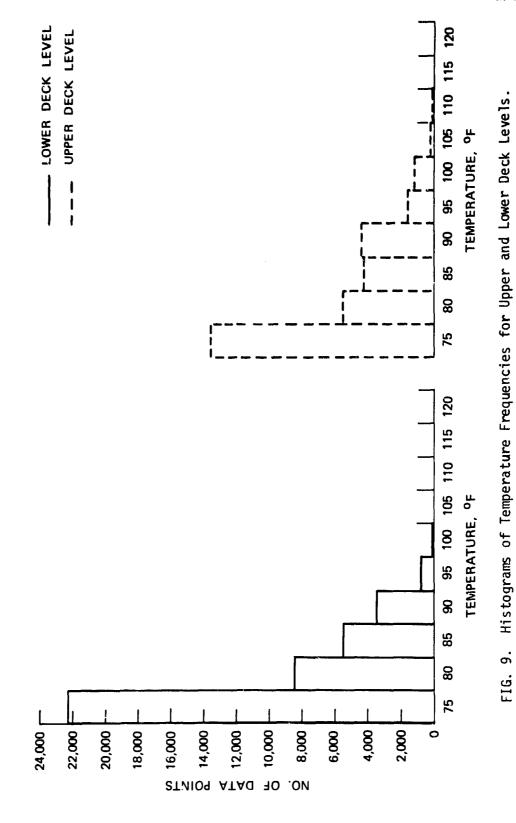


FIG. 8. Plots of Monthly Mean and Mean +3ô Temperature Data.





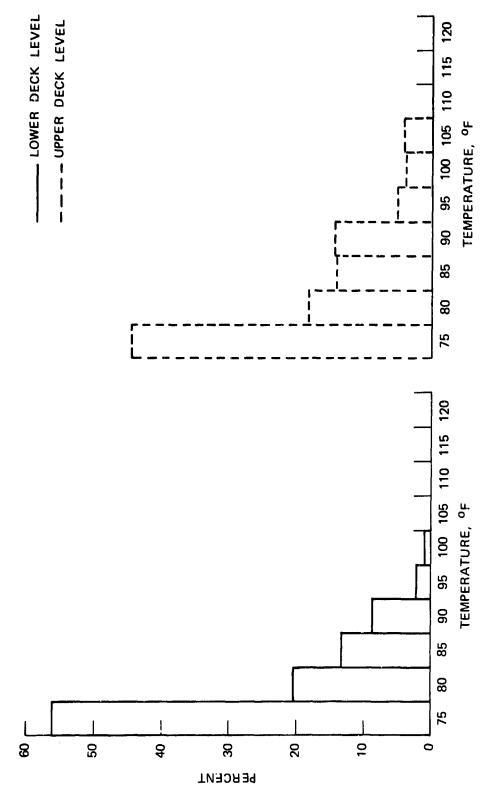


FIG. 10. Histograms of Percentages of Temperature Frequencies for Upper and Lower Deck Levels.

1 1	1		•	_]	TOTAL	76.9
1			-		ř	ا×
1 1	1	1		1	<u></u>	Ι
0 0			-	/	DEC	68.7
X TOP 10				<u>/</u>	NOV	72.0
		١×	, -		ост	78.5
•		Y	-	-	SEP	92.8
		المر	-		AUG	84.3
			-		JUL	94.2
•		1	-		NOI	81.4
			-	-	MAY	79.1
			-		APR	73.5
			+		MAR	72.8
		:			FEB	72.0
			_ \		JAN	72.4
01 8	8 8	B DEGE		1 07	MONTH	١×

TOTAL	76.9	113	110.6	30,486
	۱×	JAXALL	₹TOP 10	NTOTAL
DEC	68.7	10	100.0	3,616
NOV	72.0	86	98.7	2,949
ост	78.5	100	99.1	2,541
SEP	92.8	109	103.9	1,774
AUG	84.3	108	103.9	1,863
JUL	94.2	112	108.3	2,706
NOL	81.4	801	105.0	2,706
MAY	79.1	110	106.1	3,164
APR	73.5	113	106.6	3,056
MAR	72.8	101	99.2	2,424
FEB	72.0	8	99.2	1,905
JAN	72.4	\$	6.66	2,622
MONTH	ı×	MAX	, Тор 10	z

FIG. 11. Consolidated Data for Upper Deck Level.

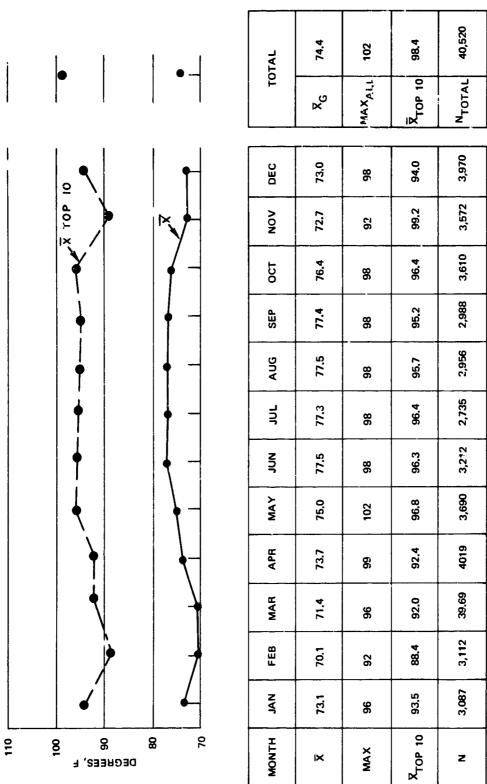


FIG. 12. Consolidated Data for Lower Deck Level.

CONCLUSION

It was observed from the daily temperature data that the highest temperature ever recorded on these ships over the given period was 113°F.

It appears, judging from the derived temperature data, that the shipboard ordnance stored in these lockers and magazines will probably never be subjected to a temperature above 120°F.

The temperature data show that the upper deck level storage magazines were encountering higher air temperature than the lower deck level magazines, and that the daily temperature fluctuation was more stable and predictable in the lower deck level magazines. These differences can be attributed to direct solar radiation and wind impinging on upper deck level storage lockers and magazines. Also, the lower deck level compartments and magazines seem to have better temperature control systems and the sea water moderates the below-waterline magazines causing the temperature to be more stable.

The maximum temperature and $\overline{X}+3\widehat{\sigma}$ data listed in Tables 3 and 4 indicate, in general, that the recorded maximum temperatures are not necessarily exceeding the upper $\overline{X}+3\widehat{\sigma}$ values. This can be attributed to the fact that the data distributions are, contrary to the assumption, not necessarily Gaussian. A possible flatness and skewness in the data distribution had taken place since some of these data were obtained from temperature controlled magazines resulting in truncation of the upper and lower temperatures. The flatness and the skewness of a distribution are discussed in Appendix E.

BLANK PAGE

Appendix A DATA HANDLING

The data is handled as follows:

1. The log data is key punched (Fig. 13).

Entry
blank month day year blank minimum temperature
blank maximum temperature blank
day of year compartment identification ship hull number

2. The daily maximum and minimum temperatures are plotted on a bar graph.

Data flow is as follows (Fig. 14):

- 1. The keypunched data are used as input to the ITAPE program; this program writes and stores the data in a series of files on a magnetic tape. A set of storage data for one storage magazine per year constitutes a file.
- 2. The magnetic tape is then used as input to the TEMP and TEMPA programs. The TEMP program computes the mean and standard deviation for each compartment for each month and lists the daily high and low temperatures recorded. The TEMPA program sorts out the high temperatures over the given interval of °F and can cover any one or more of the compartments for any given month.
- 3. The TEMP and TEMPA programs provide the tabulation and punched cards that are used as input to the PLOT program; this program provides plots of the reduced data.
- 4. Tabulations and plots are bound and kept for permanent records. Also, the magnetic tape written for input is kept for permanent storage.

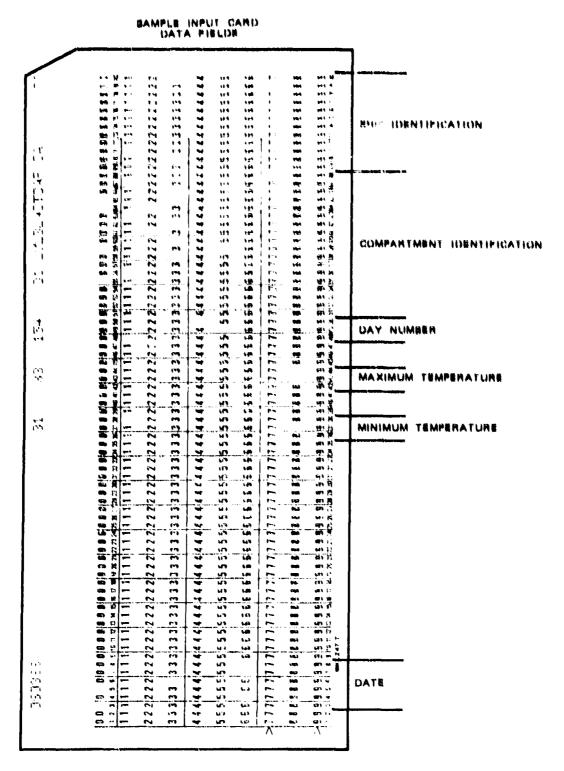


FIG. 13. Sample Input Card With Data Fields,

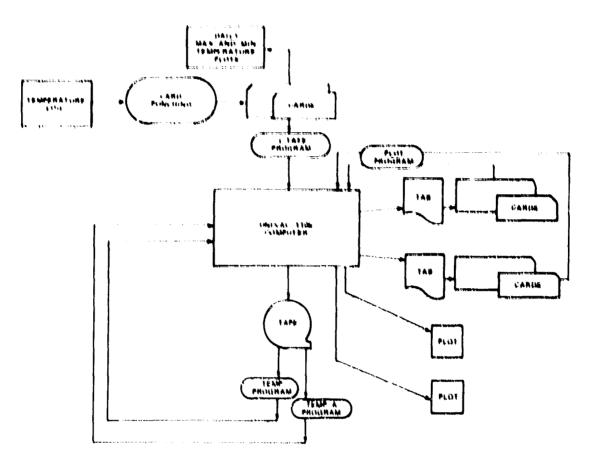


FIG. 14. Data Handling Flow Chart.

Appendix B EXPLANATION OF DICK LEVEL AND COMPARTMENT IDENTIFICATIONS 1

The various decks of a ship are numbered, using the main deck as a base line. On all ships except aircraft carriers, the main deck is the uppermost deck that runs the length of the ship; on aircraft carriers the hangar deck is the base line. Below the main deck are the second deck, third deck, etc. Above the main deck are the Ol (pronounced on one) level, Ol level, etc.

Two systems of compartment numbering are presently in use, but only the newer system (begun in March 1949) is described here. Compartments are designated by a grouping of various letters and numbers, separated by hyphens. Each compartment is designated by its deck number, frame number (starting at zero at the bow and increasing towards aft), relation to ship's centerline, and usage. An example of this numbering system is 3-75-4-M. The 3 indicates the third deck; the 75 indicates that the forward boundary of the compartment is at frame 75; the 4 indicates that it is on the port of the ship (an odd number would indicate starboard side); and the M indicates that the compartment is used as a magazine. Other compartment designations are A for storage spaces, C for control spaces (areas normally manned, such as CIC communications spaces, and the pilot house), E for engineering spaces, F for fuel storage, Q for miscellaneous spaces (shops, offices, laundry, and galley), T for vertical access trunks, and L for living (berthing) spaces.

General Guide for Shipboard Visitors, Naval Weapons Center, China Lake, Calif.

Appendix C SAMPLE DATA


Daily maximum and minimum temperature data are plotted on a bargraph (Fig. 15). A bar-graph is available for each storage magazine on the six ships.

The daily maximum and minimum temperature data from each storage magazine are tabulated, and the monthly mean maximum and minimum temperatures with their standard deviations are computed as shown in Fig. 16. The number of temperatures and the maximum temperature recorded for the month are also listed in this tabulation.

A sample plot of the computer output is presented in Fig. 17. This plot gives the monthly means of the maximum and minimum temperature data.

"Level Up" temperature data presented in Fig. 18 shows the number of given temperatures encountered for the given month for all combined upper deck level magazine temperature data. The mean maximum and minimum temperatures and their standard deviations are also computed and listed as well as the total number of data points for the month.

A typical plot for the upper deck level data is presented in Fig. 19.

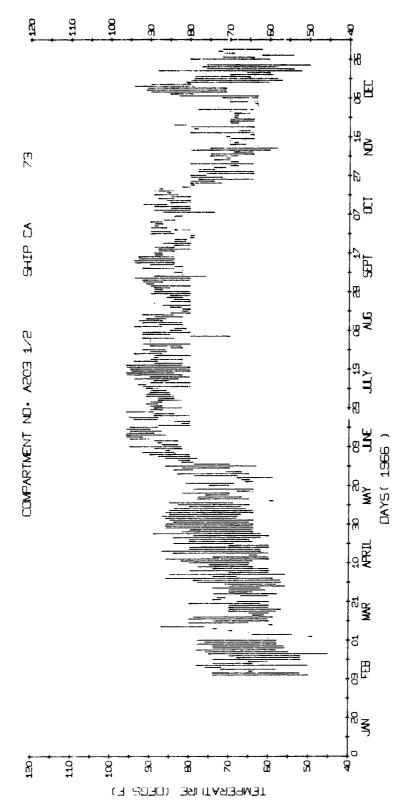


Typical Bar Graph of Daily Maximum and Minimum Temperatures. FIG. 15.

		MAX	:	83	:			KAX	80	90	7			×	0	ŧ	9		
		Z	:	52	•		6.292 4.002	Z	89	62	8		5.755	Z	\$	ç	3		
		X	:	*	:		.	XX	9	5	70			MAX	K	2	9		
		NIN	•	52	:		DEVLATION: DEVIATION:	MIN MAX	59	9	*		DEVIATION: DEVIATION:	213	69	9	\$		
		MAX	:	5	92		DEVI, DEVI,	KAX	81	70	*		DEVI, DEVI,	X	R	2	8		
		X	:	9	S)		STANDARD STANDARD	ĭ	76	9	62		STANDARD	MIN	*	9	3		
		ž	:	2	73		STA	MAX	*	70	20		STA	KAX	*	9	8		
		NIM	:	3	\$		18 56.22 73.39 78.00	NI H	5	57	61		31 61.42 70.94 87.00	X	9	62	3		Ş
		MAX	*	78	2			MAX	5	70	2			MAX	90	87	29		
		Z	:	8	8		ASURED	M	5	3	\$		ISURED TOEO	MIN MAX	9	62	3		
		MAX	:	26	*		NT TOWN	MAX	3	65	2		S RECOR	HAX	2	5	5		Š
		X	:	72	ያ		NUMBER OF DATA POINTS MEASURED: MEAN MINIMUM TEMPERATURE MEAN MAXIMUM TEMPERATURE : MAXIMUM TEMPERATURE RECORDED :	HIN MAX	\$	9	8		NUMBER OF DATA POINTS MEASURED: MEAN MINIMUM TEMPERATURE MEAN MAXIMUM TEMPERATURE : MAXIMUM TEMPERATURE RECORDED :	NIN	9	9	3		Date Bothte Messing
		XXX	÷	2	18		DATA ET 17 PER 13	K X	5	3	67		DATA H TE PER	MAX	5	9	٤		4
		KIN	**	Š	3		ER OF C PINIM MAXIM CH TE	MIN MAX	ź	19	9		NUMBER OF DAI MEAN MINIMUN MEAN MAXIMUN MAXIMUM TEMPI	N N	8	3	9		ž
		XX	:	65	2		NCMBI MEAN MEAN MAX 21	XAX	20	2	Ç		NCMBE WEAN WEAN WAXIN	MAX	2	2	5		
		MIN	*	3	8			KIN	\$	ŝ	2			Z	3	9	62		
		KAX	*	2	75			MAX	9	90	*			MAX	9	98	80		
		I	:	Z	\$			K	9	9	72			K	50	9	65		
22	203 1/2	MAX	:	2	70	:		X X	2	*	3	82		MAX	2	95	8	:	
_	¥Ş	KIN	:	20	\$2	:		X	8	9	40	57		Z	57	5	3	:	
ა 		••	_																
	LOCATI	YEAR	1966					YEAR	1966					YEAR	1966				
313	STORAGE LOCATION:	момтн	FEB					HONTH	# AR					MONTH	APR				

*** INDICATES TEMPERATURE DATA NOT AVAILABLE.

FIG. 16. Sample of Computer Output Tabulation.

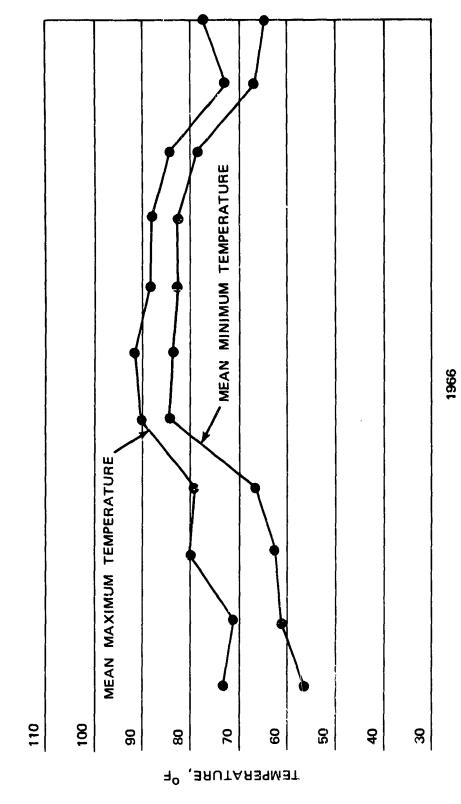

Sample of Computer Output Plot. FIG. 17.

TEMPERATURE DATA DEGREES F


SHIP : CA 73 STORAGE LOCATION: LEVEL UP TIME PERIOD : 2-11-66 TO 2-28-66

LESS THAN	OR I	EQUAL	TO	NUMBER
	ON .	•	10	
75		75		144
80		80		14
85		85		3
90		90		1
95		95		0
100		100		0
105		105		0
110		110		0
115		115		0
120		120		0
125		125		0
130		130		0
135		135		0
140		140		0
TEMPERATUR	E GREATER	THAN	140	0

MAXIMUM TEMPERATURE RECORDED: 88.

MEAN MAXIMUM TEMPERATURE : 66.6 STANDARD DEVIATION: 7.17 MEAN MINIMUM TEMPERATURE STANDARD DEVIATION: 6.34 : 61.2

FIG. 18. Sample of Computer Output Tabulation on Monthly Upper Deck Level Data.

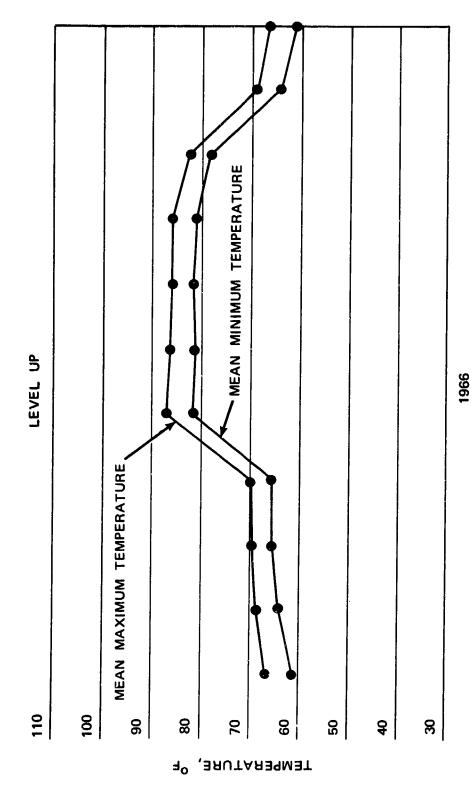

Sample of Computer Output Pilot on Monthly Upper Deck Level Data. FIG. 19.

Appendix D
OFFICIAL U. S. NAVY PHOTOGRAPHS

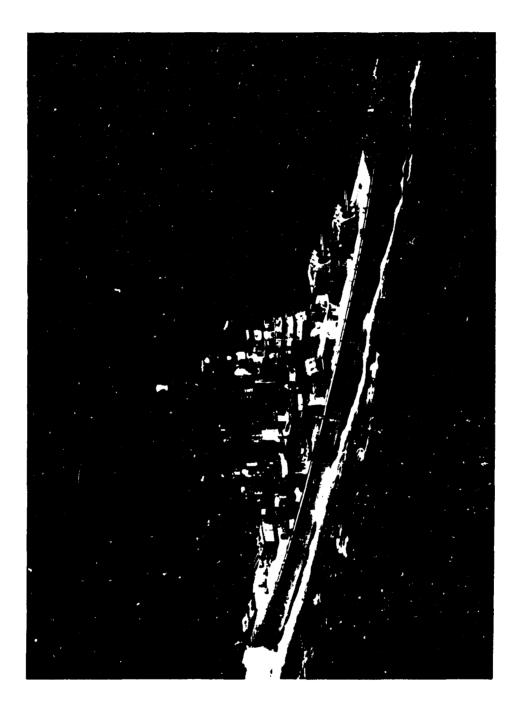


FIG. 20. USS ST. PAUL (CA73).

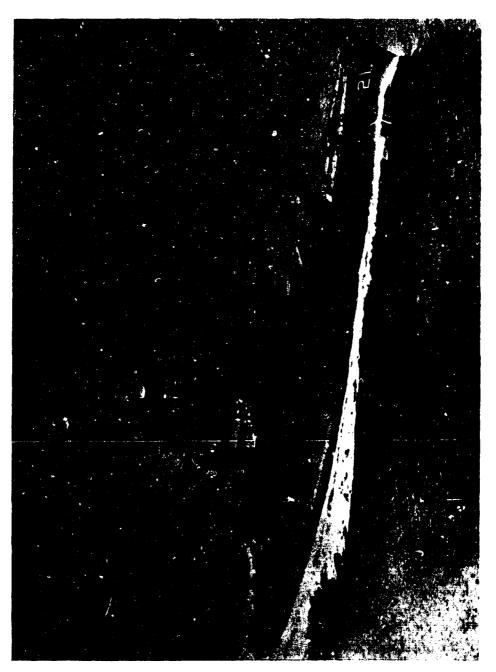


FIG. 21. USS GRIDLEY (DLG-21).



FIG. 22. USS ENGLAND (DLG-22).

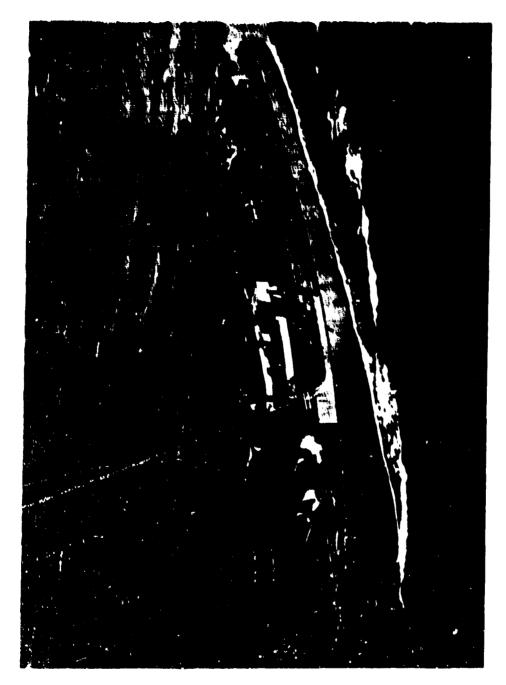


FIG. 23. USS LYNDE MCCORMICK (DDG-2).

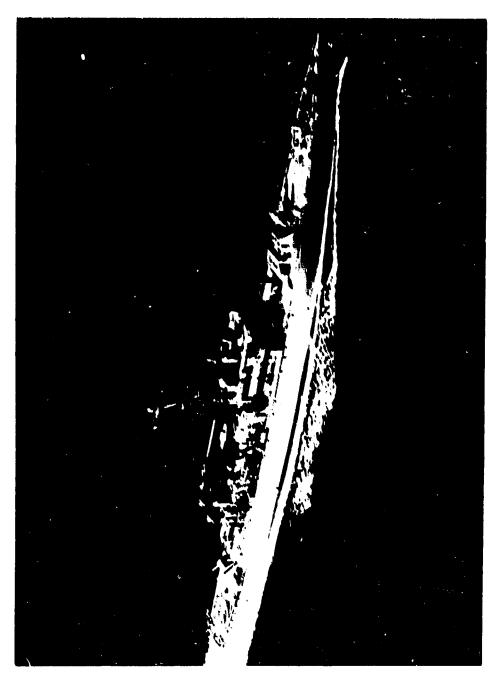


FIG. 24. USS BAINBRIDGE (DLG(N)25).



FIG. 25. USS BOSTON (CAG 1).

BLANK PAGE

Appendix E APPLICABLE STATISTICS

The sample mean, denoted \overline{X} , is the arithmetic average of the maximum temperatures recorded for the given month and ship magazine.

The estimate of standard deviation, denoted $\widehat{\sigma}$, is a measure of dispersion, spread, or variability of the observed temperature data about the sample mean temperature and is defined as follows:

$$\hat{\sigma} = \sqrt{\frac{\sum_{i=1}^{N} (x_i - \overline{x})^2}{N-1}}$$

where:

X; is the observed temperatures,

 \overline{X} is the sample mean temperature, and

N is the total number of observations.

If the data are assumed to be dispersed or distributed normally (Gaussian distribution) within the given month, then $\hat{\sigma}$ can be used for calculating the percentage of temperature readings that would exceed the nominal temperature.

The Guassian distribution is a symmetrical bell-shaped curve about the mean extending infinitely in both positive and negative directions and defined as follows:

$$Y = \frac{1}{\sigma \sqrt{2\pi}} e^{-1/2 \left(\frac{X-\mu}{\sigma}\right)^2}$$

where:

Y is the normal curve.

 $\pi = 3.1416$,

e = 2.7183,

Part

or is the standard deviation,

n is the true mean, and

X is the measured data.

The total area between this curve and the X axis is equated to unity, 1. The curve is concave downward for X within $l\sigma$ of the mean and concave upward for X farther than $l\sigma$ from the mean.

The normal (or Gaussian) distribution and the skewed distributions are illustrated in Fig. 26. The areas included between $\pm 1\sigma$, $\pm 2\sigma$, and $\pm 3\sigma$ are equal respectively to 67.27%, 95.45%, and 99.73% of the total area under the curve which is normalized to unity.

It is noted here that the distribution for within-month temperatures may vary from month to month in that the skewness and the kurtosis of these distributions differ. The degree of departure of the distribution from the symmetrical bell-shaped curve is the skewness of the distribution and is defined as follows:

3 (mean-median)
skewness = standard deviation, where


the median is the arithmetic mean of the two middle values of a set of values arranged in order of magnitude. For an example, a set of values (8, 9, 10, 7, 6, 7) is rearranged to (6, 7, 7, 8, 9, 10) and the median for this set is defined as follows:

median =
$$\frac{7+8}{2}$$
 = 7.5


The mode shown in Fig. 26 is defined as the value which occurs with the greatest frequency in the set of data, in the example above, the mode is 7.

The kurtosis is the degree of peakedness of a distribution illustrated in Fig. 27 and normally given relative to a normal distribution.

Graphically, as shown in Fig. 27, when the distribution is a relatively high peak, then the standard deviation (σ) of the distribution can be expected to be relatively smaller than that of the Gaussian distribution. On the other hand, when the distribution is relatively flattopped, then the standard deviation of the distribution can be expected to be relatively greater than that of the Gaussian distribution.

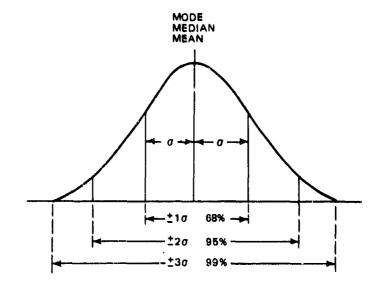

NORMAL (OR GAUSSIAN) DISTRIBUTION

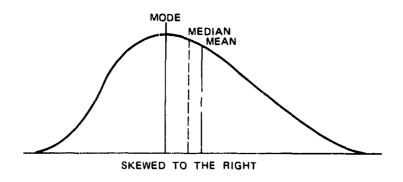

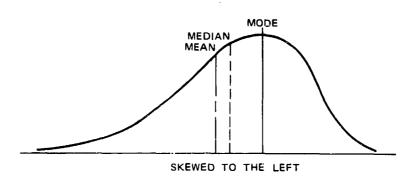


FIG. 26. Gaussian Distribution and Skewed Distributions.




FIG. 27. Distribution Curves.

This leads to the interpretation of the maximum temperature not exceeding the \overline{X} + 36 values due to the temperature data distribution being somewhat flat-topped and certainly deviating from the Gaussian distribution which would have smaller standard deviation than the flat-topped distribution as shown in Fig. 28.

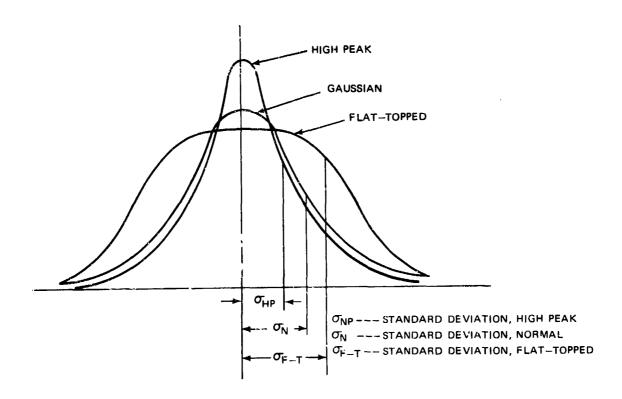


FIG. 28. Variations in Standard Deviation.

Part T

Further study was made to yield the data shown in Fig. 11 and 12. These data were consolidated (upper level and lower level separately) to augment the statement made in the conclusion. If the data shown in these figures are representative temperature data, then it can be said that the chance of the upper level storage magazine encountering a temperature of 113°F or greater is 1 in 30,496 or less (essentially zero), and the chance of encountering a temperature of 111°F or greater, 1 in 3,049 or less (essentially very small). Similarly, the chance of the lower level magazine encountering a temperature of 102°F or greater is 1 in 40,520 or less, and of encountering a temperature of 93°F or greater, 1 in 4,052.

REFERENCES

- 1. U. S. Naval Ordnance Test Station. Launcher Environment of the ASROC Motor, Part 1. Motor Wall Temperatures, by Colin A. Taylor and H. C. Schafer. China Lake, Calif., NOTS, June 1967. (NOTS TP 4349, Part 1), UNCLASSIFIED.
- 2. U. S. Naval Weapons Center. Launcher Environment of the ASROC Motor, Part 2. Deck Magazine Temperatures, by H. C. Schafer and Colin A. Taylor. China Lake, Calif., NWC, December 1969. (NWC TP 4349, Part 2), UNCLASSIFIED.
- 3. ----. Environmental Criteria Determination for Chaff Rocket (Southeast Asia), by Howard C. Schafer. China lake, Calif., NWC, November 1968. (NWC TP 4619), UNCLASSIFIED.

0 0 0 0							
Security Classification							
	NTROL DATA - R						
Security classification of title, body of abstract and index	cing annotation must be e						
1 ORIGINATING ACTIVITY (Corporate author)	28. REPORT SECURITY CLASSIFICATION						
Naval Weapons Center		UNCLASSIFIED					
China Lake, California 93555		26. GROU'S					
3. REPORT TITLE							
THERMAL EXPOSURE OF AMMUNITION ON BOA PART 1. CRUISERS AND LARGE DESTROYER							
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)							
5. AUTHOR(5) (First name, middle initial, last name)							
Sakaye Matsuda and Howard C. Schafer							
6. REPORT DATE	78. TOTAL NO. O.	PAGES	7b. NO. OF REFS				
March 1970	56		3				
SA. CONTRACT OR GRANT NO.	SA. ORIGINATOR'S	REPORT NUM	BER(\$)				
6, PROJECT NO.	NW	C TP 4824	, Part 1				
AIRTASK A33-330/216/70-F19.332.301							
· ,	9b. OTHER REPOR	T NO(5) (Any o	ther numbers that may be assigned				
d.							
10. DISTRIBUTION STATEMENT							
THIS DOCUMENT IS SUBJECT TO SPECIAL EXP GOVERNMENTS OR FOREIGN NATIONALS MAY B WEAPONS CENTER.	ORT CONTROLS AND E MADE ONLY WITH I	EACH TRANS	MITTAL TO FOREIGN VAL OF THE NAVAL				
11. SUPPLEMENTARY NOTES	12. SPONSORING M	ILITARY ACT	VITY				
	Naval Air Systems Command Washington, D. C. 20360						

The magazine air temperature records from CAG, CA, DDG, DLG, and DLG(N) type ships have been statistically analyzed to obtain the probable thermal exposure to be found on these type ships. The information is divided into the temperature expectancies for the 03, 02, 01, 1, 2, 3, 4, 5, and 6 deck levels as applicable. Effort has been made to eliminate information from compartments influenced by the engine room. This report includes 71,016 data points from the six ships. The ships were all assigned to the 7th Fleet in this time frame.

DD FORM 1473

5th 0101-801-1801

END